
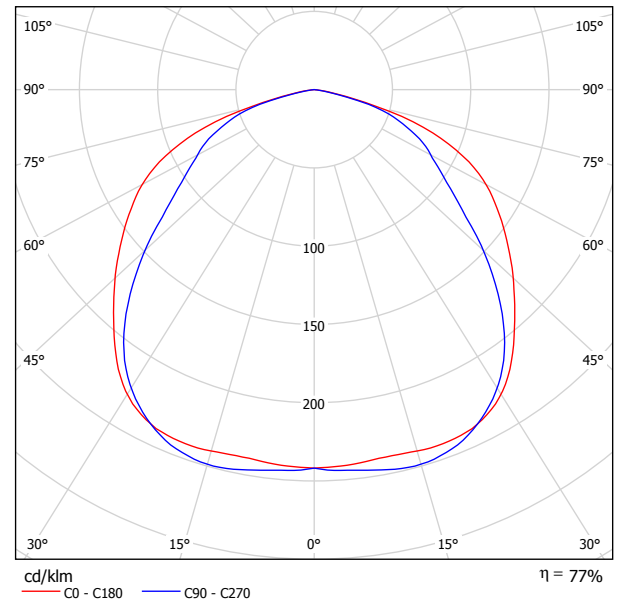


Tobias Grau GmbH
Siemensstrasse 35b
25462 Rellingen

Operator Daniel König
Telephone 04101/370-2016
Fax 04101/370-1000
e-Mail daniel.koenig@tobias-grau.com

TobiasGrau FL10-0 JANE FLOOR cable brown / Luminaire Data Sheet

Luminous emittance 1:

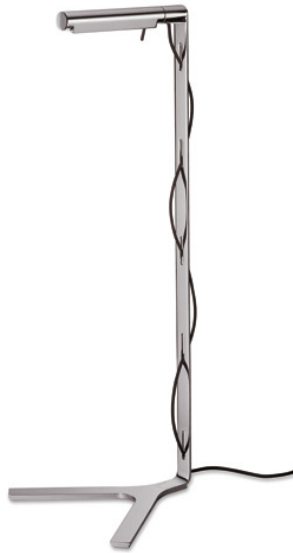

Luminaire classification according to DIN: A40
CIE flux code: 48 81 97 100 77

JANE FLOOR is a floor lamp with a timeless design shape. The materials chrome, wenge and the textile-jacketed wire give the lamp its classic appearance. The lamp head is rotatable 360°.

JANE also comes as a table lamp.

Bulb: 1x G9 60W-230V (included)
l/w/h: 360/405/1,050mm

Luminous emittance 1:

Glare Evaluation According to UGR												
ρ Ceiling	70	70	50	50	30	70	70	50	50	30		
ρ Walls	50	30	50	30	30	50	30	50	30	30		
ρ Floor	20	20	20	20	20	20	20	20	20	20		
Room Size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
2H	2H	25.3	26.6	25.6	26.8	27.1	24.0	25.3	24.3	25.5	25.8	
	3H	26.9	28.1	27.2	28.4	28.6	25.5	26.7	25.8	26.9	27.2	
	4H	27.3	28.4	27.7	28.7	29.0	26.0	27.1	26.3	27.4	27.7	
	6H	27.4	28.4	27.8	28.7	29.0	26.1	27.1	26.5	27.4	27.7	
	8H	27.4	28.4	27.7	28.7	29.0	26.1	27.1	26.4	27.4	27.7	
4H	12H	27.3	28.3	27.7	28.6	29.0	26.0	27.0	26.4	27.3	27.6	
	2H	25.9	27.0	26.3	27.3	27.6	24.9	26.1	25.3	26.3	26.6	
	3H	27.8	28.7	28.2	29.0	29.4	26.7	27.7	27.1	28.0	28.3	
	4H	28.3	29.1	28.7	29.5	29.8	27.5	28.3	27.9	28.7	29.0	
	6H	28.4	29.1	28.8	29.5	29.9	27.7	28.4	28.1	28.8	29.2	
8H	8H	28.4	29.0	28.8	29.4	29.9	27.7	28.3	28.1	28.7	29.2	
	12H	28.4	29.0	28.8	29.4	29.8	27.7	28.3	28.1	28.7	29.1	
	4H	28.6	29.2	29.0	29.6	30.0	27.9	28.5	28.3	28.9	29.3	
	6H	28.7	29.3	29.2	29.7	30.1	28.2	28.8	28.7	29.2	29.6	
	8H	28.7	29.2	29.2	29.6	30.1	28.2	28.7	28.7	29.2	29.6	
12H	12H	28.7	29.1	29.2	29.6	30.1	28.2	28.6	28.7	29.1	29.6	
	4H	28.6	29.2	29.0	29.6	30.0	27.9	28.5	28.3	28.9	29.3	
	6H	28.7	29.2	29.2	29.6	30.1	28.2	28.7	28.7	29.1	29.6	
	8H	28.7	29.1	29.2	29.6	30.1	28.2	28.7	28.7	29.1	29.6	
	8H	28.7	29.1	29.2	29.6	30.1	28.3	28.7	28.8	29.1	29.6	
Variation of the observer position for the luminaire distances S												
S = 1.0H	+0.2 / -0.2					+0.2 / -0.2						
S = 1.5H	+0.3 / -0.4					+0.4 / -0.5						
S = 2.0H	+0.3 / -0.6					+0.7 / -1.0						
Standard table	BK04					BK05						
Correction Summand	10.2					9.8						
Corrected Glare Indices referring to 790lm Total Luminous Flux												

Components:

•2 x